
RESIDENTIAL ELECTRIC VEHICLE CHARGER
TOMMATECH LIKYA AC VEHICLE CHARGERS (WITH SOCKET)



Product Features

- %100 Solar Compatible
- Type 2 Cable
- IP54 Protection Class
- Efficiency
- %100 Domestic Software
- Wi-Fi
- 2 YEARS Product Warranty
- Bluetooth
- Indoor and Outdoor Use

Connection Diagram

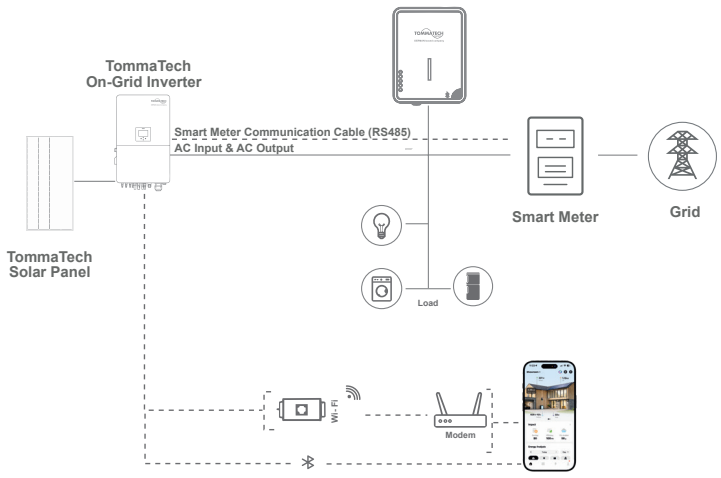

AC NOMINAL INPUT	
Phases/Lines	For Single-Phase Connection / L1+N+PE For Three-Phase Connection / L1+L2+L3+N+PE
Voltage [V]	For Single-Phase Connection / 220+%10 For Three-Phase Connection / 380±%10
Frequency [Hz]	50 / 60

AC NOMINAL OUTPUT	
Voltage [V]	For Single-Phase Connection / 220+%10 For Three-Phase Connection / 380+%10
Current [A]	6~32
Power [kW]	For Single-Phase Connection / 1.35~7.4 For Three-Phase Connection / 4.15~22

INTERFACE	
Wi-Fi	Yes
Bluetooth	Yes
RGB Led	Yes

GENERAL DATA	
Housing Material	Plastic / Metal
Installation Method	Wall Mounting
Wall Mounting Bracket	Yes
Charging Output	Type 2 Socket Output
Operating Temperature [°C]	-30~+50
Operating Humidity [%]	%5-%95 Non-condensing
Operating Altitude [m]	<2000
Protection Class	IP54
Application Area	Indoor / Outdoor
Cooling Concept	Natural Cooling
Dimensions [mm]	337x140x253
Weight [kg]	5,6

SAFETY PRECAUTION	
Multiple Protection	Short Circuit Protection, Residual Current Protection, Grounding Protection, Surge Protection. Over-temperature Protection
Residual Current Protection	30mA Type A RCD (EN 61008) + 6mA DC protection (EN 62955)
Safety Standard	EN 61851 - 22:2002 / EN IEC 61851-21-2:2021
Regulations	2014 / 30 / EU Electromagnetic Compatibility (EMC) Directive / 2014 / 35 / EU Low Voltage Directive (LVD)
Warranty [years]	2

TommaTECH AC EV Chargers have been developed to meet the daily charging needs of electric vehicle owners. They are especially ideal for use in locations where vehicles remain parked for extended periods, such as residential buildings, detached houses, residential complex car parks, and workplaces.

They are suitable for both single-phase and three-phase operation. Thanks to their low installation cost, ease of use, and compatibility with existing electrical infrastructure, they are among the most preferred charging solutions for individual users.

RESIDENTIAL ELECTRIC VEHICLE CHARGER


TOMMATECH LIKYA AC CHARGER (WITH CABLE)



Product Features

- %100 Solar Compatible
- Type 2 Cable
- IP54 Protection Class
- Efficiency
- %100 Domestic Software
- Wi-Fi
- 2 YEARS Product Warranty
- Bluetooth
- Indoor and Outdoor Use

Connection Diagram

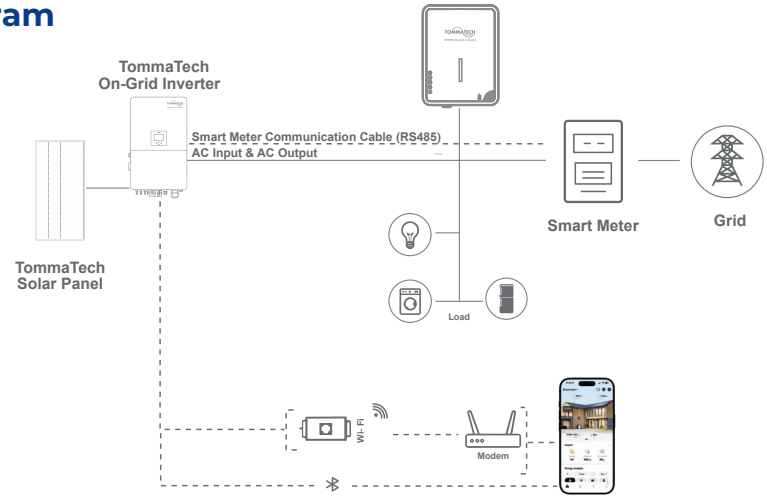

AC NOMINAL INPUT	
Phases/Lines	For Single-Phase Connection / L1+N+PE For Three-Phase Connection / L1+L2+L3+N+PE
Voltage [V]	For Single-Phase Connection / 220+%10 For Three-Phase Connection / 380±%10
Frequency [Hz]	50 / 60

AC NOMINAL OUTPUT	
Voltage [V]	For Single-Phase Connection / 220+%10 For Three-Phase Connection / 380+%10
Current [A]	6~32
Power [kW]	For Single-Phase Connection / 1.35 / 3.2 / 3.7 / 7.4 For Three-Phase Connection / 4.15 / 7 / 11 / 22

INTERFACE	
Wi-Fi	Yes
Bluetooth	Yes
RGB Led	Yes

GENERAL DATA	
Housing Material	Plastic / Metal
Installation Method	Wall Mounting
Wall Mounting Bracket	Yes
Charging Output	Charging Cable with Type 2 Connector
Operating Temperature [°C]	-30~+50
Operating Humidity [%]	%5-%95 Non-condensing
Operating Altitude [m]	<2000
Protection Class	IP54
Application Area	Indoor / Outdoor
Cooling Concept	Natural Cooling
Dimensions [mm]	337x140x253
Weight [kg]	6,2

SAFETY PRECAUTION	
Multiple Protection	Short Circuit Protection, Leakage Current Protection, Grounding Protection, Surge Protection. Overtemperature Protection
Residual Current Protection	30mA Type A RCD (EN 61008) + 6mA DC protection (EN 62955)
Safety Standard	EN 61851-22:2002 - EN IEC 61851-21-2:2021
Regulations	2014 / 30 / EU Electromagnetic Compatibility (EMC) Directive - 2014 / 35 / EU Low Voltage Directive (LVD)
Warranty [years]	2

TommaTECH AC EV Chargers have been developed to meet the daily charging needs of electric vehicle owners. They are especially ideal for use in locations where vehicles remain parked for extended periods, such as residential buildings, detached houses, residential complex car parks, and workplaces.

They are suitable for both single-phase and three-phase operation. Thanks to their low installation cost, ease of use, and compatibility with existing electrical infrastructure, they are among the most preferred charging solutions for individual users.